

AstroHalo™


High Tech Leads Industry



300W~310W

5BB-Monocrystalline PV Module

CHSM6610M(BL) Series (156.75)

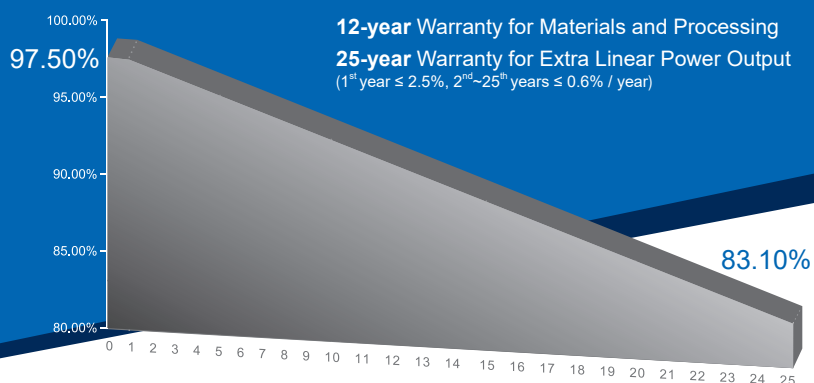

KEY FEATURES

- OUTPUT POSITIVE TOLERANCE**
 Guaranteed 0~+5W positive tolerance ensures power output reliability.
- INNOVATIVE PERC CELL TECHNOLOGY**
 Excellent cell efficiency and output.
- LOWER TEMPERATURE COEFFICIENT**
 Improved temperature coefficient decreases power loss in the high temperature application.
- THE-STATE-OF-THE-ART APPEARANCE**
 Full black designed for a better aesthetic appearance and building integration.
- PASSED HAIL TEST**
 Certified to hail resistance: ice ball size (d=45mm) and ice ball velocity (v=30.7m/s).
- PID RESISTANCE**
 Excellent PID resistance at 96 hours (@85°C /85%) test, and also can be improved to meet higher standards for the particularly harsh environment.

COMPREHENSIVE CERTIFICATES



First solar company which passed the TUV Nord IEC/TS 62941 certification audit.

For Global Market



ASTRONERGY
A CHNT COMPANY



ELECTRICAL SPECIFICATIONS

STC rated output (P_{mpp})*	300 Wp	305 Wp	310 Wp
Rated voltage (V_{mpp}) at STC	32.59 V	32.80 V	32.96 V
Rated current (I_{mpp}) at STC	9.21 A	9.30 A	9.42 A
Open circuit voltage (V_{oc}) at STC	39.90 V	40.05 V	40.18 V
Short circuit current (I_{sc}) at STC	9.68 A	9.72 A	9.86 A
Module efficiency	18.3%	18.6%	18.9%
Rated output (P_{mpp}) at NMOT	220.5 Wp	224.1 Wp	227.8 Wp
Rated voltage (V_{mpp}) at NMOT	30.00 V	30.21 V	30.31 V
Rated current (I_{mpp}) at NMOT	7.35 A	7.42 A	7.52 A
Open circuit voltage (V_{oc}) at NMOT	37.01 V	37.15 V	37.27 V
Short circuit current (I_{sc}) at NMOT	7.79 A	7.82 A <td 7.93 A	
Temperature coefficient (P_{mpp})	- 0.380%/°C		
Temperature coefficient (I_{sc})	+0.042%/°C		
Temperature coefficient (V_{oc})	- 0.284%/°C		
Nominal module operating temperature (NMOT)	46±2°C		
Maximum system voltage (IEC/UL)	1000V _{DC}		
Number of diodes	3		
Junction box IP rating	IP 67		
Maximum series fuse rating	20 A		

STC: Irradiance 1000W/m², Cell Temperature 25°C, AM=1.5

NMOT: Irradiance 800W/m², Ambient Temperature 20°C, AM=1.5, Wind Speed 1m/s

CURVE

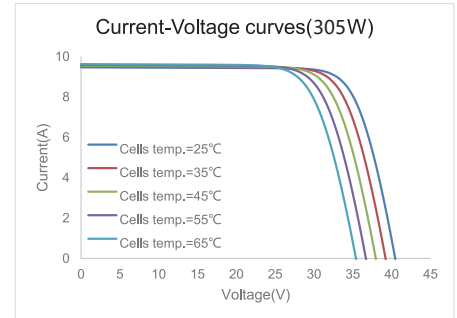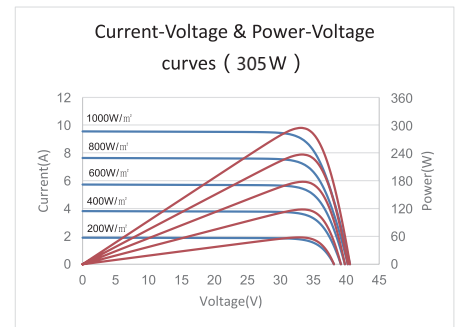

MECHANICAL SPECIFICATIONS

Outer dimensions (L x W x H)	1650 x 992 x 35 mm 64.96 x 39.06 x 1.38 in
Frame technology	Aluminum, black anodized
Module composition	Glass / EVA / Backsheet (black)
Front glass thickness	3.2 mm / 0.13 in
① Cable length (IEC/UL)	900 mm / 35.43 in
Cable diameter (IEC/UL)	4 mm ² / 12 AWG
② Maximum mechanical test load	5400 Pa (front) / 2400 Pa (back)
Fire performance (IEC/UL)	Class C (IEC) or Type 1 (UL)
Connector type (IEC/UL)	MC4 compatible

① Option: 900(+)/600(-) mm or 1000 mm for defined projects in advance.

② Refer to Astronergy Crystalline Silicon PV Module Installation Manual or contact technical department.
Maximum Mechanical Test Load=1.5×Maximum Mechanical Design Load.


PACKING SPECIFICATIONS

① Weight (module only)	18.4 kg / 40.57 lbs
② Packing unit	31 pcs / box
Weight of packing unit (for 40'HQ container)	609 kg / 1343 lbs
Number of modules per 40'HQ container	868 pcs

① Tolerance +/- 1.0kg

② Subject to sales contract

MODULE DIMENSION DETAILS

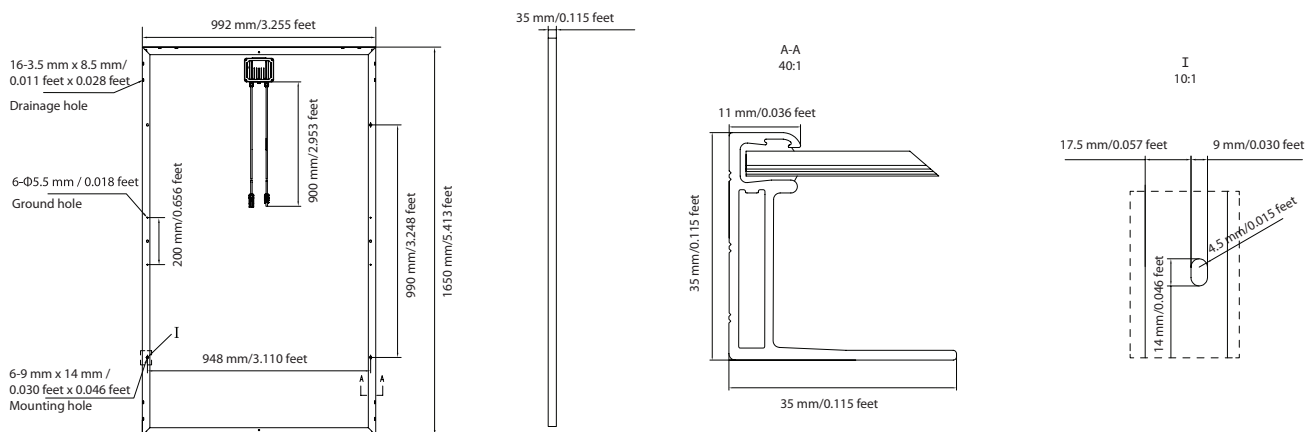

© Chint Solar (Zhejiang) Co., Ltd. Reserves the right of final interpretation. please contact our company to use the latest version for contract.